


DCS patch cable LCDU/APC - LCDU/APC, E9/125 G.652.D BLO

High-performance

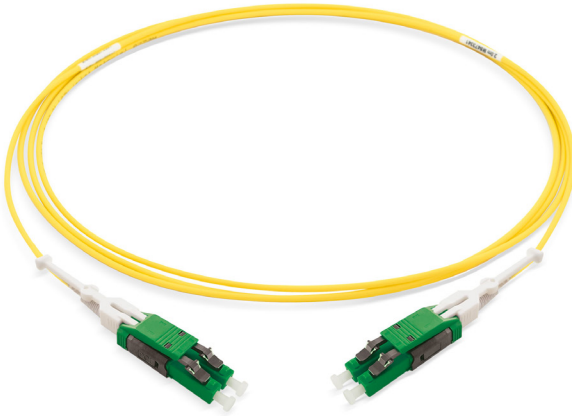

DCS patch cable (FR/LSZH), 2 fibres OS2

Description

Uniboot patch cable with Intelli-Cross® mechanism for fast polarity change.
Compact cable design with FR/LSOH cable sheath (2.1 mm) and 2 fibres.
Available in standard lengths up to 10 m.
Other lengths available on request.
Connectivity A to A or A to B.
Sticker labelling at both cable ends.
Each patch cable is equipped with push-pull tabs.

Application

The LCD to LCD patch cables for are suitable for all high-performance applications with duplex signals in the data center environment. The round patch cables are assembled with LCD Uniboot Intelli-Cross Pro connectors (high-performance) at both ends. The patch cables are assembled to a very high quality and guarantee optimum values for optical performance (IL/RL).

Construction

Cable	round
Outer sheath colour	yellow
Outer sheath material	FR/LSZH

Optical Properties

Fibre type	E9/125 G.652.D BLO
Ferrule material	Zirconia
Connector type side A	LCDU/APC
Ferrule polishing connector A	APC 8°
IL maximal, connector A	0.25 dB
IL typical, connector A	0.12 dB
RL minimal, connector A	65 dB
RL typical, connector A	75 dB
Connector type side B	LCDU/APC
Ferrule polishing connector B	APC 8°
IL maximal, connector B	0.25 dB
IL typical, connector B	0.12 dB
RL minimal, connector B	65 dB
RL typical, connector B	75 dB

Mechanical properties

Housing colour connector A	green
Housing colour connector B	green

Scope of delivery

DCS patch cable (FR/LSOH) with 2 fibres OS2
 High-performance connector assembly with LCD Uniboot Intelli-Cross Pro.
 All connectors incl. push-pull tabs.
 Sticker labelling at both cable ends.

Standards

Smoke density	IEC 61034-1/-2
Zero halogen no corrosive gases	IEC 60754-1/-2
Flame propagation	IEC 60332-1-2
Flame spread	IEC 60332-3-22

Note

Connectivity methods according to TIA-568-C.3 and EN 50174-1

Versions

Material number	Product	Length (m)	Polarity	Weight [kg]	Packing unit	GTIN / EAN
47336000ZY	DCS patch cable LCDU/APC - LCDU/APC	1	A to A	0.02 kg	1 pc.	40393910007374
47336100ZY	DCS patch cable LCDU/APC - LCDU/APC	2	A to A	0.02 kg	1 pc.	40393910007367
47336200ZY	DCS patch cable LCDU/APC - LCDU/APC	3	A to A	0.03 kg	1 pc.	40393910007350
47336300ZY	DCS patch cable LCDU/APC - LCDU/APC	4	A to A	0.03 kg	1 pc.	40393910007343
47336400ZY	DCS patch cable LCDU/APC - LCDU/APC	5	A to A	0.04 kg	1 pc.	40393910007336
47336500ZY	DCS patch cable LCDU/APC - LCDU/APC	6	A to A	0.04 kg	1 pc.	40393910007329
47336600ZY	DCS patch cable LCDU/APC - LCDU/APC	7	A to A	0.04 kg	1 pc.	40393910007312

Material number	Product	Length (m)	Polarity	Weight [kg]	Packing unit	GTIN / EAN
47336700ZY	DCS patch cable LCDU/APC - LCDU/APC	8	A to A	0.05 kg	1 pc.	40393910007305
47336800ZY	DCS patch cable LCDU/APC - LCDU/APC	9	A to A	0.05 kg	1 pc.	40393910007299
47336900ZY	DCS patch cable LCDU/APC - LCDU/APC	10	A to A	0.06 kg	1 pc.	40393910007282
47334000ZY	DCS patch cable LCDU/APC - LCDU/APC	1	A to B	0.02 kg	1 pc.	40393910007480
47334100ZY	DCS patch cable LCDU/APC - LCDU/APC	2	A to B	0.02 kg	1 pc.	40393910007473
47334200ZY	DCS patch cable LCDU/APC - LCDU/APC	3	A to B	0.03 kg	1 pc.	40393910007466
47334300ZY	DCS patch cable LCDU/APC - LCDU/APC	4	A to B	0.03 kg	1 pc.	40393910007459
47334400ZY	DCS patch cable LCDU/APC - LCDU/APC	5	A to B	0.04 kg	1 pc.	40393910007442
47334500ZY	DCS patch cable LCDU/APC - LCDU/APC	6	A to B	0.04 kg	1 pc.	40393910007435
47334600ZY	DCS patch cable LCDU/APC - LCDU/APC	7	A to B	0.04 kg	1 pc.	40393910007428
47334700ZY	DCS patch cable LCDU/APC - LCDU/APC	8	A to B	0.05 kg	1 pc.	40393910007411
47334800ZY	DCS patch cable LCDU/APC - LCDU/APC	9	A to B	0.05 kg	1 pc.	40393910007404
47334900ZY	DCS patch cable LCDU/APC - LCDU/APC	10	A to B	0.06 kg	1 pc.	40393910007398

Intelli-Cross® is a registered trademark of SEIKOH GIKEN Co., Ltd.

Subject to technical modification

As of 2023-11-23 13:02:59