


## JE-H(St)H...Bd FE180 E30 L fire alarm

Fire alarm cable, max. 225V, Keram

halogen-free, with improved fire characteristics,  
with reference to VDE 0815,  
circuit integrity (FE180) in accordance with VDE 0472-814, IEC 60331, EN 50200,  
System Circuit Integrity E30\* in accordance with DIN 4102-12

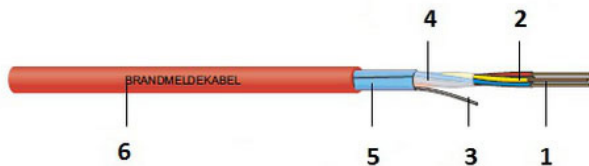

- 1 Conductor: solid
- 2 Insulation: cross-linked polymer, zero halogen
- 3 Drain wire: Ø 0.8 mm
- 4 Separator: plastic tape, zero halogen
- 5 Shielding: Al-laminated tape, zero halogen
- 6 Sheath: FRNC/LSZH



1 x 2 x 0.8 and 2 x 2 x 0.8  
also available in PullQuick box

### Descrizione

Cables with intrinsic fire resistance are installed in all areas that require special protection of people and equipment against fire and fire damages and where strict security requirements must be fulfilled. Suitable for indoor applications. For outdoor applications, protection must be provided against exposure to direct sunlight. The cable should only be laid directly in earth or water if a protective conduit is used. These cables correspond to the demands of System Circuit Integrity E30\* in accordance with DIN 4102-12. System Circuit Integrity is guaranteed at an operating voltage up to 110V.

Permitted operating temperature at conductor of +70°C.

### Costruzione

Colori delle anime	DIN VDE 0815
Conduttore	Bare copper, solid, 0.8 mm diameter, VDE 0815
Isolamento	Fire-resistant, cross-linked, high-performance Keram special compound, EN 50290-2-36
Shielding	Al-laminated tape with copper drain wire Ø 0.8 mm

### Proprietà generali

Integrità del circuito	E30
Integrità dell'isolamento	FE 180
Installation temperature	-5 °C - +50 °C
Operating temperature	-30 °C - +70 °C
Materiale della guaina esterna	Flame retardant polyolefin compound VDE 0819 part 107, EN 50290-2-27 and VDE 0250-214 "HM 2"

## Proprietà elettriche

Capacitive coupling 0,8 mm, 100m @ 800Hz	200 pF/km
Minimum insulation resistance	100 MΩ x km
operating capacity, 1km @ 800Hz	120 nF/km
peak voltage	225 V
resistenza massima del loop 0,8 mm	73,2 Ω/km
Test voltage 50Hz, core/core	500 V
Test voltage 50Hz, core/screen	2.000 V

## Proprietà meccaniche

Curvatura minima durante l'installazione (multicore)	7.5 x D
Minimum bending radius permanent (multi core)	7.5 x D
Resistenza minima allo schiacciamento / 10cm	1.000 N

## Standards

Integrità del circuito (FE180)	IEC 60331-11/-21 (180 minutes), VDE 0472-814 (FE180), BS 6387 C/W/Z, IEC 60331-1 (120 minutes), IEC 60331-2 (120 minutes), EN 50200 (PH120 minutes), NBN 713-020, VDE 0482-200 (PH120), VDE 0482-362, AREI-RGIE Art.104-FR1
Zero alogeni nessun gas corrosivo	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2, AREI-RGIE Art.104-SA
Propagazione della fiamma	AREI-RGIE Art.104-F1, EN 60332-1-2, IEC 60332-1-2, VDE 0482-332-1-2
Flame spread	IEC 60332-3-22/-24 Cat. A/C, EN 60332-3-22/-24 Cat. A/C, VDE 0482-332-3-22/-24 Cat. A/C, AREI-RGIE Art.104-F2
Densità del fumo	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2, AREI-RGIE Art.104-SD
Integrità del circuito di sistema	DIN 4102-12, AREI-RGIE Art.104-FR2

## Nota

System Circuit Integrity is dependent on installation method.

## Versioni

Codice art.	Prodotto	Colore della guaina esterna	Numero di core	Diametro esterno della guaina [mm]	Tasso di CU [kg/km]	Weight [kg/km]	Fire load [kWh/m]	Unità di imballaggio	GTIN / EAN
18837400ZK	JE-H(S)tH...Bd FE180 E30 L fire alarm 2x2x0,8 mm	rosso	2	6,1	25	59	0,123	1000 m tamburo	40393910035230
18837400ZL	JE-H(S)tH...Bd FE180 E30 L fire alarm 2x2x0,8 mm	rosso	2	6,1	25	59	0,123	500 m tamburo	40393910035223
18837400ZZ	JE-H(S)tH...Bd FE180 E30 L fire alarm 2x2x0,8 mm	rosso	2	6,3	25	60	0,123	al metro	40393910035209
18837700ZP	JE-H(S)tH...Bd FE180 E30 L fire alarm 1x2x0,8 mm	rosso	2	5,4	15	40	0,123	250 m PullQuick box	40393910210767
18837400ZP	JE-H(S)tH...Bd FE180 E30 L fire alarm 2x2x0,8 mm	rosso	2	6,1	25	60	0,123	250 m PullQuick box	40393910210774
188375	JE-H(S)tH...Bd FE180 E30 L fire alarm 4x2x0,8 mm	rosso	2	9	45	102	0,21	al metro	40393910072167

Additional dimensions available on request.

