


# Management panels & cable shelves

19"/1U

in different versions

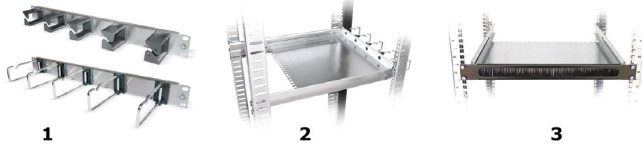

1. Management panel 19" & 1U, version made of stainless steel, with 5 support brackets
2. 19" cable shelf with management panel
3. 19" cable shelf with cable feedthrough panel and strip

## Description

Management panels 19"/1U are suitable for the routing of copper and fibre optic cables, particularly suitable for patch cords in racks or cabinets with 19" mounting angles and rails. Cable shelves fulfil the same function, particularly for multiple (trunk) cables. The basic management panels 19"/1U are available in three versions:

a) stainless steel, b) black or c) grey. These panels come without support brackets. They can be fitted with 5 support brackets in the required dimension. Please order the support brackets separately! There are labelling strips for complete management panels with support brackets available.

## Versions

Material number	Product	Colour	Weight [kg]	Packing unit
1411480	Support bracket, depth: 60 mm	black	0.02 kg	1 pc.
1411481	Support bracket, depth: 75 mm	silver	0.04 kg	1 pc.
1411482	Support bracket, depth: 110 mm	silver	0.09 kg	1 pc.
1411604	Management panel 19"/1U for 5 support brackets (delivery without brackets)	light grey	0.35 kg	1 pc.
1407689	Management panel 19"/1U for 5 support brackets (delivery without brackets)	black	0.35 kg	1 pc.
418200	Management panel 19"/1U for 5 support brackets (delivery without brackets)	silver	0.35 kg	1 pc.
401240	19" blank plate, 1U		0.35 kg	1 pc.
401241	19" blank plate, 1U	black	0.36 kg	1 pc.
401242	19" blank plate, 1U	silver	0.4 kg	1 pc.
401243	19" blank plate, 2U	light grey	0.8 kg	1 pc.
401244	19" blank plate, 2U	black	0.8 kg	1 pc.
401245	19" blank plate, 2U	silver	0.8 kg	1 pc.
401247	Cable feedthrough panel with strip 19"/1U	light grey	0.4 kg	1 pc.
401248	Cable feedthrough panel with strip 19"/1U	black	0.4 kg	1 pc.
401249	Cable feedthrough panel with strip 19"/1U	silver	0.4 kg	1 pc.
400300	19" cable shelf, depth adjustable due to slide rails (from 520 mm up to 850 mm) (only mountable with a management panel or cable feedthrough panel; rear side 19" fixation necessary)		3.5 kg	1 pc.