


FO Universal wbGGFR / U-DQ(ZN)BH

up to 144 fibres, Euroclass Eca

metal-free, dry interstices,

rodent protection, flame retardant

in accordance with IEC 60332-1-2 and IEC 60332-3-24

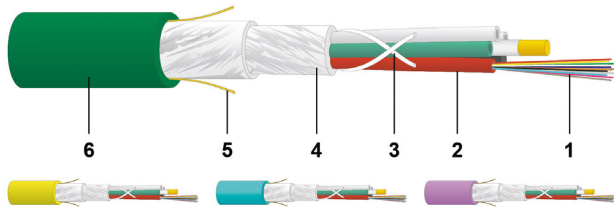

- 1 ≤ 12 fibres
- 2 Loose tube
- 3 Swelling tape
- 4 Glass armour
- 5 Ripcord
- 6 FR/LSOH sheath



Description

Robust, metal-free fibre optic outdoor and indoor cable with stranded loose tubes.

High crush resistance for high transmission reliability.

Easy to handle due to cable construction with dry interstices.

Non-metallic rodent protection.

The two coloured ripcords are easy to identify and enable the safe opening of the cable sheath.

Flame retardant halogen-free FR/LSOH sheath.

Applicazione

LAN backbone, access and riser zone.

Connection cable between the building distributors and/or floor distributors.

Suitable for laying in cable trays, ducts and vertical shafts.

Can also be spliced in all FO distributors and joints.

Costruzione

Outer sheath material	FRNC/LSZH
-----------------------	-----------

Proprietà generali

Impronta	DATWYLER «cable type» «Datwyler designation» «DIN designation» «no. of fibres» «fibre type» «add. text» «batch no.» «meter marks»
Installation temperature	-10 °C - +50 °C
Integrità del circuito	No
Operating temperature	-25 °C - +70 °C
Storage temperature	-25 °C - +70 °C

Standards

Tensile performance	IEC 60794-1-21 E1N
Crush resistance	IEC 60794-1-21 E3
Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6
Torsion	IEC 60794-1-21 E7
Bend	IEC 60794-1-21 E11
Water penetration	IEC 60794-1-22 F5
Reaction to fire (Euroclasses)	EN 13501-6: E _{ca}
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2
Flame Propagation	EN 60332-1-2, IEC 60332-1-2, VDE 0482-332-1-2
Flame Spread	IEC 60332-3-24, EN 60332-3-24, VDE 0482-332-3-24
Smoke Density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2
Resistenza ai raggi UV	EN 50289-4-17

Versions

Numero Materiale	Product	Reaction To Fire	Outer sheath colour	Fibre type	Diametro esterno della guaina [mm]	Raggio di curvatura [mm]	Weight [kg\km]	Tensile load short term [N]	Tensile load continuous [N]	Crush resistance short term [N]	Crush resistance continuous [N]	Fire load [kWh\m]	Packing unit
19261300EZ	FO Universal 2x12	Eca	verde	E9/125 G.652.D OS2	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
19020700EZ	FO Universal 3x12	Eca	verde	E9/125 G.652.D OS2	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
19267800EZ	FO Universal 3x12	Eca	verde	G50/125 OM4	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
19020800EZ	FO Universal 4x12	Eca	verde	E9/125 G.652.D OS2	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
19342400EZ	FO Universal 4x12	Eca	giallo	E9/125 G.652.D OS2	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
19607800EZ	FO Universal 4x12	Eca	verde	E9/125 G.652.D BLO	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
18648600EZ	FO Universal 4x12	Eca	verde	G50/125 OM3	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
19342800EZ	FO Universal 4x12	Eca	turchese	G50/125 OM3	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
19127800EZ	FO Universal 4x12	Eca	verde	G50/125 OM4	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
19343200EZ	FO Universal 4x12	Eca	heather violet	G50/125 OM4	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
19020900EZ	FO Universal 5x12	Eca	verde	E9/125 G.652.D OS2	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro
18664200EZ	FO Universal 5x12	Eca	verde	G50/125 OM3	11,4	175	149	9.000	5.000	5.000	3.000	0,616	al metro

Numero Materiale	Product	Reaction To Fire	Outer sheath colour	Fibre type	Diametro esterno della guaina [mm]	Raggio di curvatura [mm]	Weight [kg\ km]	Tensile load short term [N]	Tensile load continuous [N]	Crush resistance short term [N]	Crush resistance continuous [N]	Fire load [kWh/m]	Packing unit
19021000EZ	FO Universal 6x12	Eca	verde	E9/125 G.652.D OS2	12,2	185	165	9.000	5.000	5.000	3.000	0,681	al metro
18653900EZ	FO Universal 6x12	Eca	verde	G50/125 OM3	12,2	185	165	9.000	5.000	5.000	3.000	0,681	al metro
18674700EZ	FO Universal 8x12	Eca	verde	E9/125 G.652.D OS2	13,5	205	186	9.000	5.000	5.000	3.000	0,808	al metro
19704900EZ	FO Universal 8x12	Eca	verde	E9/125 G.652.D BLO	13,5	205	186	9.000	5.000	5.000	3.000	0,808	al metro
18654000EZ	FO Universal 8x12	Eca	verde	G50/125 OM3	13,5	205	186	9.000	5.000	5.000	3.000	0,808	al metro
19271400EZ	FO Universal 8x12	Eca	verde	G50/125 OM4	13,5	205	186	9.000	5.000	5.000	3.000	0,808	al metro
19449900EZ	FO Universal 8x12	Eca	heather violet	G50/125 OM4	13,5	205	186	9.000	5.000	5.000	3.000	0,808	al metro
19021100EZ	FO Universal 10x12	Eca	verde	E9/125 G.652.D OS2	14,8	225	219	9.000	5.000	5.000	3.000	0,936	al metro
18653600EZ	FO Universal 10x12	Eca	verde	G50/125 OM3	14,8	225	219	9.000	5.000	5.000	3.000	0,936	al metro
19021200EZ	FO Universal 12x12	Eca	verde	E9/125 G.652.D OS2	16,3	245	272	9.000	5.000	5.000	3.000	1,075	al metro
19704800EZ	FO Universal 12x12	Eca	verde	E9/125 G.652.D BLO	16,3	245	272	9.000	5.000	5.000	3.000	1,075	al metro
19171000EZ	FO Universal 12x12	Eca	verde	G50/125 OM3	16,3	245	272	9.000	5.000	5.000	3.000	1,075	al metro
19271500EZ	FO Universal 12x12	Eca	verde	G50/125 OM4	16,3	245	272	9.000	5.000	5.000	3.000	1,075	al metro

Con riserva di modifiche tecniche

A partire da 2021-03-31 14:22:19