


## FO Universal ZGGFR Easy Blow / U-DQ(ZN)BH

Fire resistant, optimized for blowing, up to 24 fibres, Euroclass Dca  
 metal-free, rodent protection,  
 in accordance with IEC 60332.1 and IEC 60332.3 C



- 1 ≤ 24 fibres
- 2 Loose tube
- 3 Glass armour
- 4 Ripcord
- 5 FR/LSOH sheath (black)

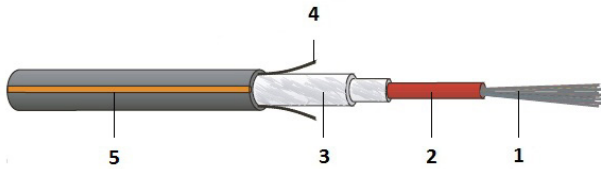

### Description

Robust, metal-free fibre optic outdoor and indoor cable with one central loose tube.  
 Optimized for blowing through thermoplastic ducts:  
 Its good greasing characteristics, smooth and strong sheath surface and good internal strength provide for an axial linear motion and reduced friction (in comparison with standard indoor/outdoor cables).  
 Non-metallic rodent protection.  
 Flame retardant and fire resistant sheath (black) with very low fire load.  
 The coloured ripcords are easy to identify and enable the safe opening of the cable sheath.

### Applicazione

For blowing through thermoplastic ducts with blowing lengths of up to 2000 m.  
 In Premises cabling for LAN backbones (Campus and Vertical/Riser cabling) as well as for tunnels.

### Costruzione

Outer sheath material	FRNC/LSZH
-----------------------	-----------

## Proprietà generali

Impronta	DATWYLER «cable type» «Datwyler designation» «DIN designation» «no. of fibres» «fibre type» «add. text» «batch no.» «meter marks»
Installation temperature	-10 °C - +50 °C
Integrità del circuito	No
Operating temperature	-25 °C - +70 °C
Storage temperature	-25 °C - +70 °C

## Standards

Tensile performance	IEC 60794-1-21 E1
Crush resistance	IEC 60794-1-21 E3
Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6
Torsion	IEC 60794-1-21 E7
Bend	IEC 60794-1-21 E11
Water penetration	IEC 60794-1-22 F5
Reaction to fire (Euroclasses)	EN 13501-6: D <sub>ca</sub>
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2
Flame Propagation	EN 60332-1-2, IEC 60332-1-2, VDE 0482-332-1-2
Flame Spread	IEC 60332-3-24, EN 60332-3-24, VDE 0482-332-3-24
Smoke Density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2
Resistenza ai raggi UV	EN 50289-4-17

## Versions

Numero Materiale	Product	Reaction To Fire	Outer sheath colour	Fibre type	Diametro esterno della guaina [mm]	Raggio di curvatura [mm]	Weight [kg\ km]	Tensile load [N]	Crush resistance short term [N]	Crush resistance continuous [N]	Fire load [kWh\m]	Packing unit
19061700DZ	FO Universal Easy Blow 1x4	Dca-s2,d1,a1	nera	E9/125 G.652.D 052	8,5	140	85	2.500	3.000	2.000	0,356	al metro
19182500DZ	FO Universal Easy Blow 1x4	Dca-s2,d1,a1	nera	G50/125 OM3	8,5	140	85	2.500	3.000	2.000	0,356	al metro
19036300DZ	FO Universal Easy Blow 1x6	Dca-s2,d1,a1	nera	E9/125 G.652.D 052	8,5	140	85	2.500	3.000	2.000	0,356	al metro
19170000DZ	FO Universal Easy Blow 1x8	Dca-s2,d1,a1	nera	E9/125 G.652.D 052	8,5	140	85	2.500	3.000	2.000	0,356	al metro
19021300DZ	FO Universal Easy Blow 1x12	Dca-s2,d1,a1	nera	E9/125 G.652.D 052	8,5	140	85	2.500	3.000	2.000	0,356	al metro
19021400DZ	FO Universal Easy Blow 1x24	Dca-s2,d1,a1	nera	E9/125 G.652.D 052	9	145	92	2.500	3.000	2.000	0,4	al metro