


Rack lighting 350mm

with mounting angles for 19"

with door contact (optional)

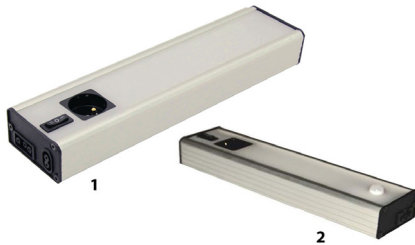

1 Lighting with LED and door position contact (230 V)



2 Door position contact TPC, straight
3 Connection cable CAB, orange

Description

Lighting with LED and TPC, AC 230 V, 11.5 W, 1200 lm

Dimensions: 350 x 92 x 46 mm

Colour: aluminium matt

Sockets:

Schuko receptacle with switch, socket for feed-through wiring, socket for connection cable; Type 1: additional socket, 2p., for door position contact (straight or angled)


Material: Aluminium, anodized

Protection degree: IP20/I

Mounting system: variable; mounting angles for 19" layer included

Designed for variable mounting: via mounting angles for 19" layer, on frames and on DIN rails.

Right image: mounting of door position contact TPC .

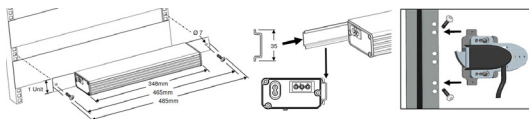

Applicazione

IT racks and technical rooms in data centres and FTTx installations

Proprietà generali

| | |
|-----------------------|----------------------|
| Average life span | 50,000 hr |
| Illuminant | Hi Power LED 1200 lm |
| Luminous colour | White, 5600 K |
| Operating temperature | -20 °C - +50 °C |
| Storage temperature | -20 °C - +60 °C |
| Umidità atmosferica | 85 % |

Proprietà elettriche

| | |
|--------------------|-------------|
| Current | 0,170 A |
| Energy consumption | 9 kWh/1000h |
| Power consumption | 11,5 W |

Scope of delivery

Single pack with mounting angles/material and installation instruction.
Please order the connection cable separately.

Standards

| | |
|-------------------------|---------------------------------------|
| CE certified | Yes |
| Directives | 2014/35/EU and 201430/EU (both types) |
| Energy efficiency class | A |

Versions

| Numero Materiale | Product | Colore | Tensione nominale AC | Peso [kg] |
|------------------|-----------------------------------|---------|----------------------|-----------|
| 280506 | LED 350mm 230V /11.5W S DC SK ALU | argento | AC 230 V | 0,8 kg |
| 280508 | TPC 230V 1.5m AN BK | nera | AC 230 V | 0,2 kg |
| 280512 | CAB 230V 3m OR | arancia | | 0,32 kg |

Other socket types on request

Con riserva di modifiche tecniche

A partire da 2021-01-27 11:42:00