


Rack lighting 350mm

with mounting angles for 19"
with door contact (optional)



1 Lighting with LED and door position contact (230 V)

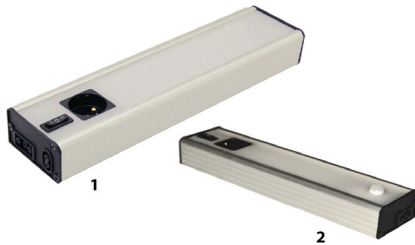

2 Door position contact TPC, straight
3 Connection cable CAB, orange

Description

Lighting with LED and TPC, AC 230 V, 11.5 W, 1200 lm

Dimensions: 350 x 92 x 46 mm

Colour: aluminium matt

Sockets:

Schuko receptacle with switch, socket for feed-through wiring, socket for connection cable; Type 1: additional socket, 2p., for door position contact (straight or angled)


Material: Aluminium, anodized

Protection degree: IP20/I

Mounting system: variable; mounting angles for 19" layer included

Designed for variable mounting: via mounting angles for 19" layer, on frames and on DIN rails.

Right image: mounting of door position contact TPC .



Application

IT racks and technical rooms in data centres and FTTx installations

General Properties

Atmospheric humidity	85 %
Average life span	50.000 hr
Illuminant	Hi Power LED 1200 lm
Luminous colour	White, 5600 K
Operating temperature	-20 °C - +50 °C
Storage temperature	-20 °C - +60 °C

Electrical properties

Current	0.170 A
Energy consumption	9 kWh/1000h
Power consumption	11.5 W

Scope of delivery

Single pack with mounting angles/material and installation instruction.
Please order the connection cable separately.

Standards

CE certified	Yes
Directives	2014/35/EU and 201430/EU (both types)
Energy efficiency class	A

Versions

Material number	Product	Colour	Normal voltage AC	Weight [kg]
280506	LED 350mm 230V /11.5W S DC SK ALU	silver	AC 230 V	0.8 kg
280508	TPC 230V 1.5m AN BK	black	AC 230 V	0.2 kg
280512	CAB 230V 3m OR	orange		0.32 kg

Other socket types on request

Subject to technical modification

As of 2020-10-28 12:09:22