


## FO Universal DLTS ZGGFR / U-BQ(ZN)BH

up to 24 fibres, Euroclass B2<sub>ca</sub>

metal-free, dry interstices, gel-free loose tube,  
rodent protection, flame retardant, longitudinally watertight

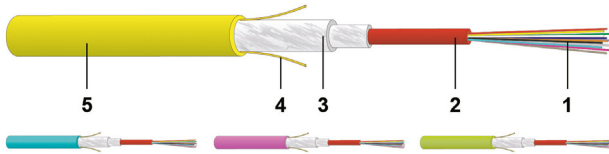

- 1 ≤ 24 fibres
- 2 Loose tube
- 3 Glass armour
- 4 Ripcord
- 5 FR/LSOH sheath



### Description

Robust, non-metallic fibre optic outdoor and indoor cable with one central dry loose tube.  
High crush resistance for high transmission reliability.  
Easy to handle due to cable construction with dry interstices and gel-free loose tubes.  
Longitudinal water-tightness by swelling yarn.  
Non-metallic rodent protection.  
The two coloured ripcords are easy to identify and enable the safe opening of the cable sheath.  
Flame retardant halogen-free FR/LSOH sheath.

### Applicazione

LAN backbone, access and riser zone.  
Connection cable between the building distributors and/or floor distributors.  
Suitable for laying in cable trays, ducts and vertical shafts.  
Can also be spliced in all FO distributors and joints.

### Costruzione

Outer sheath material	FRNC/LSZH
-----------------------	-----------

### Proprietà generali

Impronta	DATWYLER «cable type» «Datwyler designation» «DIN designation» «no. of fibres» «fibre type» «add. text» «batch no.» «meter marks»
Installation temperature	-10 °C - +50 °C
Integrità del circuito	No
Operating temperature	-25 °C - +70 °C
Storage temperature	-25 °C - +70 °C

## Proprietà meccaniche

Fibre colour code IEC 60304

## Standards

Tensile performance	IEC 60794-1-21 E1
Crush resistance	IEC 60794-1-21 E3
Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6
Torsion	IEC 60794-1-21 E7
Bend	IEC 60794-1-21 E11
Variazione di temperatura	IEC 60794-1-22 F1
Water penetration	IEC 60794-1-22 F5
Reaction to fire (Euroclasses)	EN 13501-6: B <sub>ca</sub>
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2
Flame Propagation	EN 60332-1-2, IEC 60332-1-2, VDE 0482-332-1-2
Flame Spread	IEC 60332-3-24
Smoke Density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2
Resistenza ai raggi UV	EN 50289-4-17

## Versions

Numero Materiale	Product	Reaction To Fire	Outer sheath colour	Fibre type	Diametro esterno della guaina [mm]	Raggio di curvatura [mm]	Weight [kg/km]	Tensile load short term [N]	Tensile load continuous [N]	Crush resistance short term [N]	Crush resistance continuous [N]	Fire load [kWh/m]	Packing unit
19706600BZ	FO Universal DLTS 1x4	B2ca-s1a,d1,a1	giallo	E9/125 G.652.D OS2	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19708000BZ	FO Universal DLTS 1x4	B2ca-s1a,d1,a1	turchese	G50/125 OM3	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19708500BZ	FO Universal DLTS 1x4	B2ca-s1a,d1,a1	heather violet	G50/125 OM4	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19706700BZ	FO Universal DLTS 1x6	B2ca-s1a,d1,a1	giallo	E9/125 G.652.D OS2	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19708100BZ	FO Universal DLTS 1x6	B2ca-s1a,d1,a1	turchese	G50/125 OM3	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19708600BZ	FO Universal DLTS 1x6	B2ca-s1a,d1,a1	heather violet	G50/125 OM4	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19706800BZ	FO Universal DLTS 1x8	B2ca-s1a,d1,a1	giallo	E9/125 G.652.D OS2	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19708200BZ	FO Universal DLTS 1x8	B2ca-s1a,d1,a1	turchese	G50/125 OM3	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19708700BZ	FO Universal DLTS 1x8	B2ca-s1a,d1,a1	heather violet	G50/125 OM4	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19618100BZ	FO Universal DLTS 1x12	B2ca-s1a,d1,a1	giallo	E9/125 G.652.D OS2	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19708300BZ	FO Universal DLTS 1x12	B2ca-s1a,d1,a1	turchese	G50/125 OM3	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19618500BZ	FO Universal DLTS 1x12	B2ca-s1a,d1,a1	heather violet	G50/125 OM4	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19706400BZ	FO Universal DLTS 1x12	B2ca-s1a,d1,a1	lime green	G50/125 OM5	7,6	115	68	3.000	1.000	5.000	1.000	0,234	al metro
19618200BZ	FO Universal DLTS 1x24	B2ca-s1a,d1,a1	giallo	E9/125 G.652.D OS2	8,2	125	78	3.500	1.500	5.000	1.000	0,325	al metro
19708400BZ	FO Universal DLTS 1x24	B2ca-s1a,d1,a1	turchese	G50/125 OM3	8,2	125	78	3.500	1.500	5.000	1.000	0,325	al metro

Numero Materiale	Product	Reaction To Fire	Outer sheath colour	Fibre type	Diametro esterno della guaina [mm]	Raggio di curvatura [mm]	Weight [kg\ km]	Tensile load short term [N]	Tensile load continuous [N]	Crush resistance short term [N]	Crush resistance continuous [N]	Fire load [kWh/m]	Packing unit
19618600BZ	FO Universal DLTS 1x24	B2ca-s1a,d1,a1	heather violet	G50/125 OM4	8,2	125	78	3.500	1.500	5.000	1.000	0,325	al metro

EN 60332-3-Series superseded by EN 50575

Con riserva di modifiche tecniche

A partire da 2021-03-31 14:22:19