
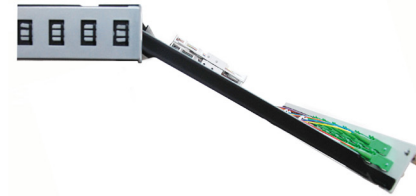


FO patch panel OV-E

19"/1U, splice box, loaded

with adapters and pigtails

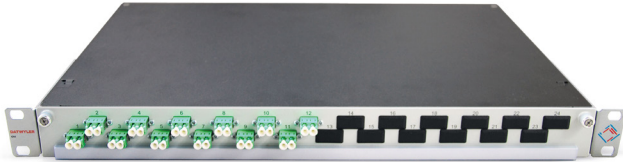

Fibre optic splice box OV-E, 19"/1U, extractable

Description

For the termination of fibre optic cables - maximum of 48 fibres.
 Loaded with FO adapters, ready for splicing, with prepared pigtails (per 2 m, colour code: IEC 60304).
 Telescopic, folding drawer with stop.
 Shelf for excess tube lengths below the drawer.
 Cable mounting plate at the rear.
 Splice cassettes are hinged, can be easily folded up.

Proprietà generali

Alloggiamento	Aluminium, black, extractable drawer with locking mechanism, box allows for depth-adjustable mounting (5 steps, maximum 50 mm)
Capacità	up to 48 fibres
Dimensioni	19"/1U, depth 250 mm
Impronta	numbers (silk screen printing) on front plate
Ingresso cavi	rear left and right pre-stamped cable entries and an enclosed breakout cable entry
Piastra frontale	Aluminium, white
Scarico della trazione	by screwed cable gland

Proprietà meccaniche

Adattatore	LCD or LSH with ceramic sleeves
------------	---------------------------------

Scope of delivery

- Splice box with
- one straight cable entry (2 x M15 + 1 x M20)
 - one breakout cable entry
 - coloured pigtails with measurement report
 - FO adapters, fastened by screws
 - complete splicing set with crimp splice protection
 - labelling strip, 410 mm
 - M6 mounting set

Versions

Numero Materiale	Product	Colour (Front-plate)	Number of adapters	Adapter	Colour (Adapter)	Fibre type	Dimensioni esterne	Pigtails	Classe della fibra	Peso [kg]	Packing unit
41516002ZY	Splice box OV-E 6xLCD, OS2	argento	6	LCD	blu	E9/125 G.652.D OS2	1 U, x 19 in x 250 mm	12 x LC	OS2	2,5 kg	1 pc.
41516402ZY	Splice box OV-E 12xLCD, OS2	argento	12	LCD	blu	E9/125 G.652.D OS2	1 U, x 19 in x 250 mm	24 x LC	OS2	3,49 kg	1 pc.



Numero Materiale	Product	Colour (Front-plate)	Number of adapters	Adapter	Colour (Adapter)	Fibre type	Dimensioni esterne	Pigtails	Classe della fibra	Peso [kg]	Packing unit
41516802ZY	Splice box OV-E 24xLCD, OS2	argento	24	LCD	blu	E9/125 G.652.D OS2	1 U, x 19 in x 250 mm	48 x LC	OS2	3,49 kg	1 pc.
41516102ZY	Splice box OV-E 6xLCD/APC, OS2	argento	6	LCD/APC	verde	E9/125 G.652.D OS2	1 U, x 19 in x 250 mm	12 x LC/APC	OS2	2,5 kg	1 pc.
41516502ZY	Splice box OV-E 12xLCD/APC, OS2	argento	12	LCD/APC	verde	E9/125 G.652.D OS2	1 U, x 19 in x 250 mm	24 x LC/APC	OS2	2,7 kg	1 pc.
41516902ZY	Splice box OV-E 24xLCD/APC, OS2	argento	24	LCD/APC	verde	E9/125 G.652.D OS2	1 U, x 19 in x 250 mm	48 x LC/APC	OS2	2,7 kg	1 pc.
41517202ZY	Splice box OV-E 6xLSH/APC, OS2	argento	6	LSH/APC	verde	E9/125 G.652.D OS2	1 U, x 19 in x 250 mm	6 x LSH/APC	OS2	2,5 kg	1 pc.
41517302ZY	Splice box OV-E 12xLSH/APC, OS2	argento	12	LSH/APC	verde	E9/125 G.652.D OS2	1 U, x 19 in x 250 mm	12 x LSH/APC	OS2	2,5 kg	1 pc.
41517402ZY	Splice box OV-E 24xLSH/APC, OS2	argento	24	LSH/APC	verde	E9/125 G.652.D OS2	1 U, x 19 in x 250 mm	24 x LSH/APC	OS2	2,8 kg	1 pc.
41517502ZY	Splice box OV-E 24xLSH-C/APC, OS2	argento	24	LSH-C/APC	verde	E9/125 G.652.D OS2	1 U, x 19 in x 250 mm	48 x LSH/APC	OS2	2,8 kg	1 pc.
41516202ZY	Splice box OV-E 6xLCD, OM3	argento	6	LCD	turchese	G50/125 OM3	1 U, x 19 in x 250 mm	12 x LC	OM3	2,5 kg	1 pc.
41516602ZY	Splice box OV-E 12xLCD, OM3	argento	12	LCD	turchese	G50/125 OM3	1 U, x 19 in x 250 mm	24 x LC	OM3	2,5 kg	1 pc.
41517002ZY	Splice box OV-E 24xLCD, OM3	argento	24	LCD	turchese	G50/125 OM3	1 U, x 19 in x 250 mm	48 x LC	OM3	2,8 kg	1 pc.
41516302ZY	Splice box OV-E 6xLCD, OM4	argento	6	LCD	heather violet	G50/125 OM4	1 U, x 19 in x 250 mm	12 x LC	OM4	2,5 kg	1 pc.
41516702ZY	Splice box OV-E 12xLCD, OM4	argento	12	LCD	heather violet	G50/125 OM4	1 U, x 19 in x 250 mm	24 x LC	OM4	2,5 kg	1 pc.
41517102ZY	Splice box OV-E 24xLCD, OM4	argento	24	LCD	heather violet	G50/125 OM4	1 U, x 19 in x 250 mm	48 x LC	OM4	2,5 kg	1 pc.

Variants on request.

Con riserva di modifiche tecniche

A partire da 2021-02-19 15:06:57