
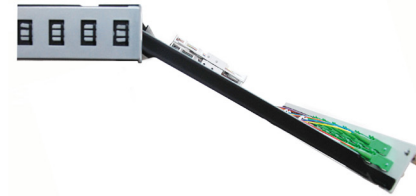


FO patch panel OV-E

19"/1U, splice box, loaded

with adapters and pigtails

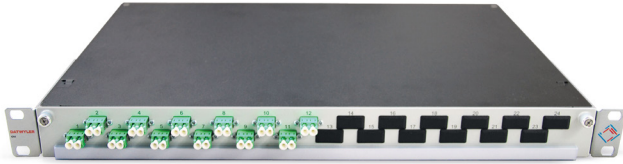

Fibre optic splice box OV-E, 19"/1U, extractable

Description

For the termination of fibre optic cables - maximum of 48 fibres.

Loaded with FO adapters, ready for splicing, with prepared pigtails (per 2 m, colour code: IEC 60304).

Telescopic, folding drawer with stop.

Shelf for excess tube lengths below the drawer.

Cable mounting plate at the rear.

Splice cassettes are hinged, can be easily folded up.

General Properties

Cable entry	rear left and right pre-stamped cable entries and an enclosed breakout cable entry
Capacity	up to 48 fibres
Dimensions	19"/1U, depth 250 mm
Front plate	Aluminium, white
Housing	Aluminium, black, extractable drawer with locking mechanism, box allows for depth-adjustable mounting (5 steps, maximum 50 mm)
Imprint	numbers (silk screen printing) on front plate
Strain relief	by screwed cable gland

Mechanical properties

Adapter	LCD or LSH with ceramic sleeves
---------	---------------------------------

Scope of delivery

Splice box with

- one straight cable entry (2 x M15 + 1 x M20)
- one breakout cable entry
- coloured pigtails with measurement report
- FO adapters, fastened by screws
- complete splicing set with crimp splice protection
- labelling strip, 410 mm
- M6 mounting set

Versions

Material number	Product	Colour (Front-plate)	Number of adapters	Adapter	Colour (Adapter)	Fibre type	Outer dimensions	Pigtails	Fibre class	Weight [kg]	Packing unit
41516002ZY	Splice box OV-E 6xLCD, OS2	silver	6	LCD	blue	E9/125 G.652.D OS2	1 U x 19 in x 250 mm	12 x LC	OS2	2.5 kg	1 pc.
41516402ZY	Splice box OV-E 12xLCD, OS2	silver	12	LCD	blue	E9/125 G.652.D OS2	1 U x 19 in x 250 mm	24 x LC	OS2	3.49 kg	1 pc.



Material number	Product	Colour (Front-plate)	Number of adapters	Adapter	Colour (Adapter)	Fibre type	Outer dimensions	Pigtails	Fibre class	Weight [kg]	Packing unit
41516802ZY	Splice box OV-E 24xLCD, OS2	silver	24	LCD	blue	E9/125 G.652.D OS2	1 U x 19 in x 250 mm	48 x LC	OS2	3.49 kg	1 pc.
41516102ZY	Splice box OV-E 6xLCD/APC, OS2	silver	6	LCD/APC	green	E9/125 G.652.D OS2	1 U x 19 in x 250 mm	12 x LC/APC	OS2	2.5 kg	1 pc.
41516502ZY	Splice box OV-E 12xLCD/APC, OS2	silver	12	LCD/APC	green	E9/125 G.652.D OS2	1 U x 19 in x 250 mm	24 x LC/APC	OS2	2.7 kg	1 pc.
41516902ZY	Splice box OV-E 24xLCD/APC, OS2	silver	24	LCD/APC	green	E9/125 G.652.D OS2	1 U x 19 in x 250 mm	48 x LC/APC	OS2	2.7 kg	1 pc.
41517202ZY	Splice box OV-E 6xLSH/APC, OS2	silver	6	LSH/APC	green	E9/125 G.652.D OS2	1 U x 19 in x 250 mm	6 x LSH/APC	OS2	2.5 kg	1 pc.
41517302ZY	Splice box OV-E 12xLSH/APC, OS2	silver	12	LSH/APC	green	E9/125 G.652.D OS2	1 U x 19 in x 250 mm	12 x LSH/APC	OS2	2.5 kg	1 pc.
41517402ZY	Splice box OV-E 24xLSH/APC, OS2	silver	24	LSH/APC	green	E9/125 G.652.D OS2	1 U x 19 in x 250 mm	24 x LSH/APC	OS2	2.8 kg	1 pc.
41517502ZY	Splice box OV-E 24xLSH-C/APC, OS2	silver	24	LSH-C/APC	green	E9/125 G.652.D OS2	1 U x 19 in x 250 mm	48 x LSH/APC	OS2	2.8 kg	1 pc.
41516202ZY	Splice box OV-E 6xLCD, OM3	silver	6	LCD	turquoise	G50/125 OM3	1 U x 19 in x 250 mm	12 x LC	OM3	2.5 kg	1 pc.
41516602ZY	Splice box OV-E 12xLCD, OM3	silver	12	LCD	turquoise	G50/125 OM3	1 U x 19 in x 250 mm	24 x LC	OM3	2.5 kg	1 pc.
41517002ZY	Splice box OV-E 24xLCD, OM3	silver	24	LCD	turquoise	G50/125 OM3	1 U x 19 in x 250 mm	48 x LC	OM3	2.8 kg	1 pc.
41516302ZY	Splice box OV-E 6xLCD, OM4	silver	6	LCD	heather violet	G50/125 OM4	1 U x 19 in x 250 mm	12 x LC	OM4	2.5 kg	1 pc.
41516702ZY	Splice box OV-E 12xLCD, OM4	silver	12	LCD	heather violet	G50/125 OM4	1 U x 19 in x 250 mm	24 x LC	OM4	2.5 kg	1 pc.
41517102ZY	Splice box OV-E 24xLCD, OM4	silver	24	LCD	heather violet	G50/125 OM4	1 U x 19 in x 250 mm	48 x LC	OM4	2.5 kg	1 pc.

Variants on request.

Subject to technical modification

As of 2020-10-23 09:13:55