


## DCS patchkabel LCDU/PC, 2 vezels OS2

Hoog prestatievermogen

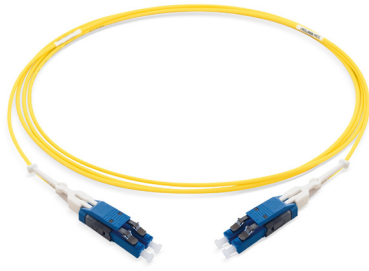

DCS patchkabel (FR/LSZH), 2 vezels OS2

### Beschrijving

Uniboot patch cable with Intelli-Cross® mechanism for fast polarity change.  
 Compact cable design with FR/LSZH cable sheath (2.1 mm) and 2 fibres.  
 Available in standard lengths up to 10 m.  
 Other lengths available on request.  
 Connectivity A to A or A to B.  
 Sticker labelling at both cable ends.  
 Each patch cable is equipped with push-pull tabs.

### Toepassing

The LCD to LCD patch cables for are suitable for all high-performance applications with duplex signals in the data center environment. The round patch cables are assembled with LCD Uniboot Intelli-Cross Pro connectors (high-performance) at both ends. The patch cables are assembled to a very high quality and guarantee optimum values for optical performance (IL/RL).

### Constructie

Buitenmantel	FR/LSZH
Kabel	rond
Mantelkleur	geel

### Optische eigenschappen

Connector type side A	LCDU/PC
Connector type side B	LCDU/PC
Ferrule polijsting connector A	PC 0°
Ferrule polijsting connector B	PC 0°
Metalen kapmateriaal	Zirconia
Reflectieverlies RL gemiddeld connector A	55 dB
Reflectieverlies RL gemiddeld connector B	55 dB
Reflectieverlies RL minimum connector A	50 dB
Reflectieverlies RL minimum connector B	50 dB
Verzwakking IL gemiddeld connector A	0,1 dB
Verzwakking IL gemiddeld connector B	0,1 dB
Verzwakking IL maximumconnector A	0,25 dB
Verzwakking IL maximum connector B	0,25 dB
Vezeltype	E9/125 G.652.D BLO

## Mechanische eigenschappen

Kleur behuizing connector A	blauw
Kleur behuizing connector B	blauw

## Leveringsomvang

DCS patchkabel (FR/LSOH) met 2 vezels OS2  
 Hoogwaardige connectormontage met LCD Uniboot Intelli-Cross Pro.  
 Alle aansluitingen incl. push-pull tabs.  
 Etikettering met zelfklevers aan beide kabeluiteinden.

## Normen / Standards

Nulhaloogen geen corrosieve gassen	IEC 60754-1/-2
Vlamdovend	IEC 60332-1-2
Vlam verspreid	IEC 60332-3-22 Cat. A
Rookdichtheid	IEC 61034-1/-2

## Noot

Connectivity methods according to TIA-568-C.3 and EN 50174-1

## Versies

Materiaalnummer	Artikel	Lengte (m)	Polariteit	Gewicht [kg]	Verpakkingseenheid
47332000ZY	DCS patch cable LCDU/PC - LCDU/PC	1	A to A	0,02 kg	1 stk.
47332100ZY	DCS patch cable LCDU/PC - LCDU/PC	2	A to A	0,02 kg	1 stk.
47332200ZY	DCS patch cable LCDU/PC - LCDU/PC	3	A to A	0,03 kg	1 stk.
47332300ZY	DCS patch cable LCDU/PC - LCDU/PC	4	A to A	0,03 kg	1 stk.
47332400ZY	DCS patch cable LCDU/PC - LCDU/PC	5	A to A	0,04 kg	1 stk.
47332500ZY	DCS patch cable LCDU/PC - LCDU/PC	6	A to A	0,04 kg	1 stk.
47332600ZY	DCS patch cable LCDU/PC - LCDU/PC	7	A to A	0,04 kg	1 stk.
47332700ZY	DCS patch cable LCDU/PC - LCDU/PC	8	A to A	0,05 kg	1 stk.
47332800ZY	DCS patch cable LCDU/PC - LCDU/PC	9	A to A	0,05 kg	1 stk.
47332900ZY	DCS patch cable LCDU/PC - LCDU/PC	10	A to A	0,06 kg	1 stk.
47330000ZY	DCS patch cable LCDU/PC - LCDU/PC	1	A to B	0,02 kg	1 stk.
47330100ZY	DCS patch cable LCDU/PC - LCDU/PC	2	A to B	0,02 kg	1 stk.
47330200ZY	DCS patch cable LCDU/PC - LCDU/PC	3	A to B	0,03 kg	1 stk.
47330300ZY	DCS patch cable LCDU/PC - LCDU/PC	4	A to B	0,03 kg	1 stk.
47330400ZY	DCS patch cable LCDU/PC - LCDU/PC	5	A to B	0,04 kg	1 stk.
47330500ZY	DCS patch cable LCDU/PC - LCDU/PC	6	A to B	0,04 kg	1 stk.
47330600ZY	DCS patch cable LCDU/PC - LCDU/PC	7	A to B	0,04 kg	1 stk.
47330700ZY	DCS patch cable LCDU/PC - LCDU/PC	8	A to B	0,05 kg	1 stk.
47330800ZY	DCS patch cable LCDU/PC - LCDU/PC	9	A to B	0,05 kg	1 stk.
47330900ZY	DCS patch cable LCDU/PC - LCDU/PC	10	A to B	0,06 kg	1 stk.
47311100ZY	DCS patch cable LCDU/PC - LCDU/PC	11	A to B	0,47 kg	1 stk.
47311200ZY	DCS patch cable LCDU/PC - LCDU/PC	12	A to B	0,06 kg	1 stk.
47311300ZY	DCS patch cable LCDU/PC - LCDU/PC	13	A to B	0,07 kg	1 stk.
47311400ZY	DCS patch cable LCDU/PC - LCDU/PC	14	A to B	0,07 kg	1 stk.
47311500ZY	DCS patch cable LCDU/PC - LCDU/PC	15	A to B	0,08 kg	1 stk.

Intelli-Cross® is een geregistreerd handelsmerk van SEIKOH GIKEN Co., Ltd.