


## E0 Multi-cable support

### Multi-cable support

for wall and ceiling installations

in accordance with MLAR 11/2005 3.5.3

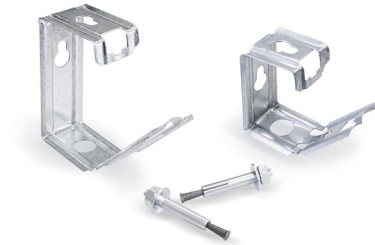

### Description

For fire-safe installation of multiple cables or lines along ceilings or walls above fireproof ceilings in accordance with MLAR 11/2005 (Not for System Circuit Integrity!). Load capacity of 1.8 kg/support or 6 kg/m (mounting distance of 30 cm).

Excerpt from MLAR 11/2005 3.5.3.:

The special requirements pertaining to fireproof fasteners for lines installed in the area between floor slabs and suspended ceilings must be observed.

### Scope of delivery

Set consists of multi-cable supports E0 and fire protection plugs KDM 30 mm.

Drill bit and tool set supplied separately.

Recommended drill bit: SDS1.

Recommended tool set: SWM-SM 50.

SM 50.

### Nota

Multi-cable support E0 and E0 S

### Versions

Numero Materiale	Product	Dimensioni esterne	Materiale	Inner dimensions	Cable weight at 30 cm	Cable weight at 40 cm	Cable weight at 50 cm	Cable weight at 60 cm	Cable weight at 70 cm	Cable weight at 80 cm	Peso [kg]	Packing unit
3800086	E0 multi-cable support	approx. 55 x 35 x 33 mm	Sendzimir galvanised sheet steel	approx. 80 x 45 x 33 mm	6,0	4,5	3,6	3,0	2,6	2,3	1,81 kg	25 pcs.
3800087	E0 S multi-cable support	approx. 63 x 45 x 33 mm		approx. 87 x 60 x 33 mm	6,0	4,5	3,6	3,0	2,6	2,3	2,82 kg	50 pcs.