


DCS fanout cable MTP-LCDU, 8 fibres OM3

for splitting 100G into 4x 25G or 40G into 4x 10G

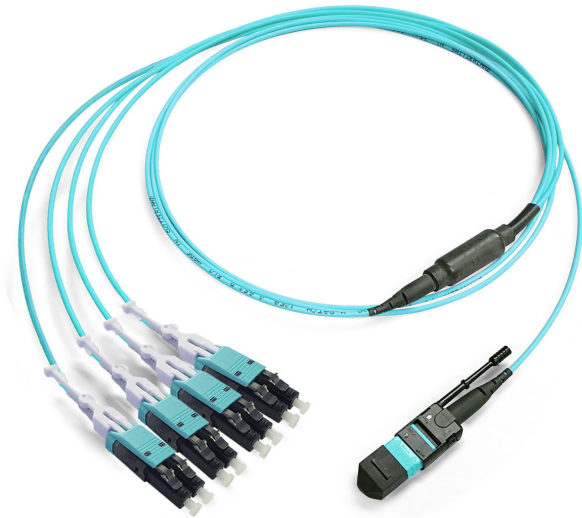

DCS fanout cable MTP-LCDU, 8 fibres OM3

Description

Thin, very flexible fibre-optic fanout cable (round cable, Ø 2.0 mm) with 8 fibres.
Low fire load due to its halogen-free flame-retardant LS0H sheath.
Available with 2.5 m standard length (other lengths on request).
Standard connectivity method can be type A or type C.
Sticker labelling at both cable ends.
Breakout separation is effected with a thin divider housing.
The legs (Ø 2.0 mm) with LCD Uniboot (LCDU) plugs are numbered (1-4).
The legs can be ordered graded in length or of equal length.
Project-specific assemblies are available on request.

Application

MTP-on-LCDU fanout cables are suitable for all high-performance applications in a data centre environment.
All well-known multimode and single-mode QSFP applications such as SR4, PSM4, PLR4 and FCp can be split into four duplex channels using this cable.
The connectivity of this fanout cable splits one 4-channel parallel optic link into four duplex links (e.g. 100G into 4x 25G or 40G into 4x 10G).
The fanout cables are assembled to a very high quality and guarantee optimum values for optical performance (IL/RL).

Construction

Outer sheath colour	turquoise
Outer sheath material	FR/LSZH

Optical Properties

Fibre type	G50/125 OM3
Colour code	IEC 60304
Connector type side A	MTP
Connector gender side A	Female (unpinned)
Ferrule polishing connector A	Elite PC 0°
IL maximal, connector A	0.25 dB
IL typical, connector A	0.15 dB
RL minimal, connector A	35 dB
RL typical, connector A	45 dB
Connector type side B	LCDU
Ferrule polishing connector B	PC 0°
IL maximal, connector B	0.25 dB
IL typical, connector B	0.12 dB
RL minimal, connector B	35 dB
RL typical, connector B	40 dB

Mechanical properties

Housing colour connector A	aqua
Housing colour connector B	aqua

Scope of delivery

DCS fanout cable (FR/LS0H) with 8 fibres OM3.
 High-performance connector assembly with MTP Elite and LCD Uniboot Intelli-Cross Pro.
 All connectors incl. push-pull tabs.
 Sticker labelling at both cable ends.

Standards

Smoke density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2
Flame propagation	IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2
Flame spread	IEC 60332-3-24
LC standard (IEC)	IEC 61754-20
MTP standard (IEC)	IEC 61754-7, IEC 61755-3-31, IEC 61755-3-32
Polarity standard	TIA-568-C.3 Type A,B,C

Note

Insertion Loss (IL) is determined by the latest measurement methods under EFL multimode excitation conditions (EFL = Encircled Flux Launch) at 850 nm in accordance with IEC 61280-4-1.

Versions

Material number	Product	Number of fibres	Length (m)	Polarity	Number of connectors side A	Number of connectors side B	Number of fibres per connector A	Number of fibres per connector B	Gradation	Weight [kg]	Packing unit	GTIN / EAN
473780	DCS fanout cable 1x MTP - 4x LCDU, equal length	8	2.5	A	1	4	8	2	equal length	0.05 kg	1 pc.	

Material number	Product	Number of fibres	Length (m)	Polarity	Number of connectors side A	Number of connectors side B	Number of fibres per connector A	Number of fibres per connector B	Gradation	Weight [kg]	Packing unit	GTIN / EAN
473781	DCS fanout cable 1x MTP -4x LCDU, graduated length	8	2.5	A	1	4	8	2	graduated length	0.05 kg	1 pc.	
473785	DCS fanout cable 1x MTP -4x LCDU, equal length	8	2.5	C	1	4	8	2	equal length	0.05 kg	1 pc.	
473786	DCS fanout cable 1x MTP -4x LCDU, graduated length	8	2.5	C	1	4	8	2	graduated length	0.05 kg	1 pc.	

MTP® and MTP Elite® are registered brands of US Conec.
Intelli-Cross® is a registered trademark of SEIKOH GIKEN Co., Ltd.

Subject to technical modification

As of 2023-11-23 13:13:55