


FO Indoor Duplex / I-V(ZN)HH

2.8 mm, LS0H, Euroclass Dca

Semi-tight buffer

flame retardant - IEC 60332.1

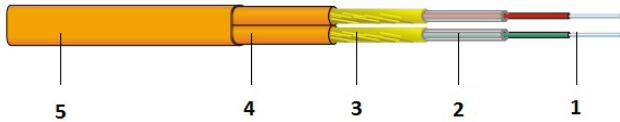

- 1 Fibre
- 2 Semi-tight buffer
- 3 Aramid yarn
- 4 Single-fibre cable: 2.8 mm
- 5 LS0H sheath



Description

Robust and flexible fibre optic Duplex cable, based on 2 single-fibre cables 2.8 mm with semi tight buffer 0.9 mm in a common sheath.

Easy handling, easy to strip off.

Flame retardant halogen-free LS0H sheath.

Low fire load.

Application

Suitable for patch cables between terminal distributors and/or end devices.

For direct termination with connectors.

Can also be spliced in terminal distributors.

Construction

Outer sheath material FRNC/LSZH

General Properties

Imprint	DATWYLER «cable type» «Datwyler designation» «DIN designation» «no. of fibres» «fibre type» «add. text» «batch no.» «meter marks»
Installation temperature	-10 °C - +50 °C
Operating temperature	-20 °C - +60 °C

Mechanical properties

Minimum number of impacts IEC 60794-1-21 E4

Standards

Tensile performance	IEC 60794-1-21 E4
Crush resistance	IEC 60794-1-21 E6
Impact	IEC 60794-1-21 E7
Repeated bending	IEC 60794-1-21 E11 A
Reaction to fire (Euroclasses)	EN 13501-6
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2
Flame Propagation	IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2, SEV TP 20B/3C 3.4.1.1
Smoke Density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2

Versions

Material number	Product	Reaction To Fire	Outer sheath colour	Fibre type	Outer sheath diameter [mm]	Bending radius [mm]	Weight [kg/km]	Tensile load [N]	Crush resistance short term [N]	Fire load [kWh/m]	Packing unit
19209502DZ	Duplex 2.8 mm	Dca-s2,d2,a1	green	E9/125 G.652.D OS2	6.6	70	26	200	3,000	0.12	by the metre
19209802DZ	Duplex 2.8 mm	Dca-s2,d2,a1	turquoise	G50/125 OM3	6.6	70	26	200	3,000	0.12	by the metre

Subject to technical modification

As of 2020-11-06 13:44:41